



Now...!

It's time to bring your presentation to life and let it captivate your audience.

Samsung Digital Presenter

SDP-900DXA

- 1/3" progressive scan CCD (850,000 pixels)
- 20fps Fast Display, USB 2.0 PC Interface
- Various External Output Supports - 1 DVI , 2 VGA
- Versatile Digital Functions :
image split, shift, freeze & rotate,
3x3 screen display and 8 pictures store
- 8 Preset Functions with up to four conditions.
- Easy to Use GUI Menus with Built-in Annotation
- Dynamic 36X Zoom (12X Optical & 3X Digital)






SPECIFICATION	DESCRIPTION	SDP-900DXA	
Optical system	Lens	F=1.5(Wide) ~ 2.1(Tele) f=5.2~66.5, 12x power zoom	
	Shooting Area	Max : 299 x 224mm, Min : 21 x 16mm	
	Zoom	Powered (12X), Digital(3X)	
	Focus	Powered (Auto Focus/Manual)	
Illumination system	Iris	Auto (with fine level adjustment)	
	Upper	Attached to the side arm of the main unit	
Video	Lower	Light box (built-in main unit)	
	Pick-up Device / Effective pixel	1/3" 850,000 pixels PS CCD / 1034(H) x 779(V)	
	Frame rate	20 frame/sec	
	Sync system	Internal sync.	
	VGA output	1024 x 768(XGA) RGB color	
	Video output	C-Video	VBS 1.0Vp-p / 75 Ω (unbalance)
		S-Video	Y : 1.0Vp-p / 75 Ω (unbalance) C : 0.286Vp-p / 75 Ω (unbalance)
		White Balance	Manual / Auto (one touch type)
	Negative / Positive	Selectable	
	Freeze	built-in	
	Input terminals	VGA:2	
	Output terminals	VIDEO : 1, VGA : 2, USB : 1, DVI: 1, RS-232C : 1, S-Video : 1, C-Video: 1	
	NTSC / PAL	Selectable	
	Remote controller	Supplied	
	GUI(Graphic User Interface)	Supplied	
	Input selection	3 channels (Internal : 1, External: 2)	
	On-screen display	Available	
	Image freeze	Available	
Image save	Available (8 frames)		
Image recall	Available (8 frames)		
Image divide	Available (2divide of 9 divide)		
Image rotation	Available (90°, 180°, 270°)		
Image transfer to computer	Available (USB : QUAR, HALF, FULL, SCREEN FULL)		
Preset function	Up to 4 user settings		
PC connection	USB	USB 1.1 / 2.0	
	RS-232C	SET control	
	Application software	Viewer software: Windows 98 or higher / Mac OS 10.2 or higher TWAIN Driver for Windows AVI Capture software for Windows	
General	Operating temperature/Humidity	+5°C ~ +35°C, 30% ~ 90%	
	Power	DC12V (Adaptor INPUT: AC100V-240V Free Voltage, 50/60Hz, OUTPUT: 12V, 4.0A)	
	Dimensions	In-use : 760(W) x 573(H) x 558(D)mm / 29.9(W)" x 22.6(H)" x 21.9(D)" Storage : 562(W) x 165(H) x 573(D)mm / 22.1(W)" x 6.5(H)" x 22.6(D)"	
	Weight	10kg / 22 lb	
	Accessories	Remote controller, Cables, etc.	

Rear Panel



Dimension

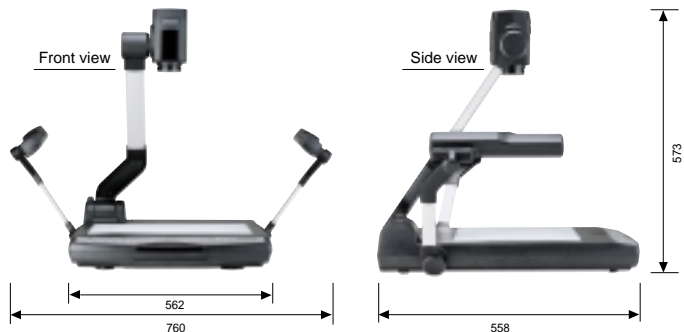

www.samsungpresenter.com

Design and specifications are subject to change without notice.



■ DISTRIBUTED BY



SAMSUNG TECHWIN CO., LTD.
145-3, Sangdaewon 1-dong, Jungwon-gu,
Seongnam-si, Gyeonggi-do 462-703, Korea
Tel : +82-31-740-8137~8141 Fax : +82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC.
ELECTRONIC IMAGING DIV.
40 Seaview Drive, Secaucus, NJ 07094, U.S.A
Tel : +1-201-902-0347 Fax : +1-201-902-0429

SAMSUNG TECHWIN MOSCOW OFFICE
Korp 14, 37-A, PR-KT, Leningradsky,
Moscow 125167, Russia
Tel : +7-95-258-9296, 9298 Fax : +7-95-258-9297

SAMSUNG OPTO-ELECTRONICS UK, LTD.
Samsung House, 1000 Hillwood Drive,
Hillwood Business Park Chertsey, Surrey KT16 OPS
Tel : +44-1932-45-5308 Fax : +44-1932-45-5325

TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.
7 Pingchang Rd., Nankai Dist. Tianjin 300190, P.R. China
Tel : +86-22-2761-4724(33821) Fax : +86-22-2761-6514